


# TBT OMEGA-PROFILE 50 AND L-PROFILE 50

## PRODUCT DESCRIPTION

The Omega- and L-profiles are used to support fire protection boards to set up a suspended fire protection ceiling in a tunnel structure of beams or grinders.


The boards can also be used to build a substructure for fire protection encasements. The profiles can be created by different steel qualities to withstand the tunnel environment.

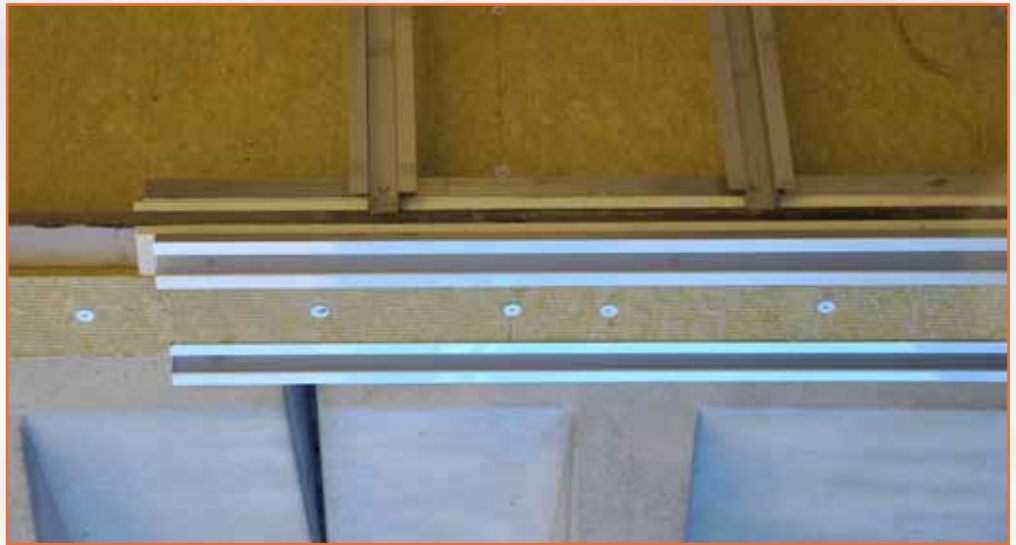

# TECHNICAL DATA

## OMEGA-PROFILE

MATERIAL: 1.4401 / 1.4404  
WEIGHT: 2,1 kg/lm  
LENGTH: 3000-6000 mm  
THICKNESS: 1,25 mm

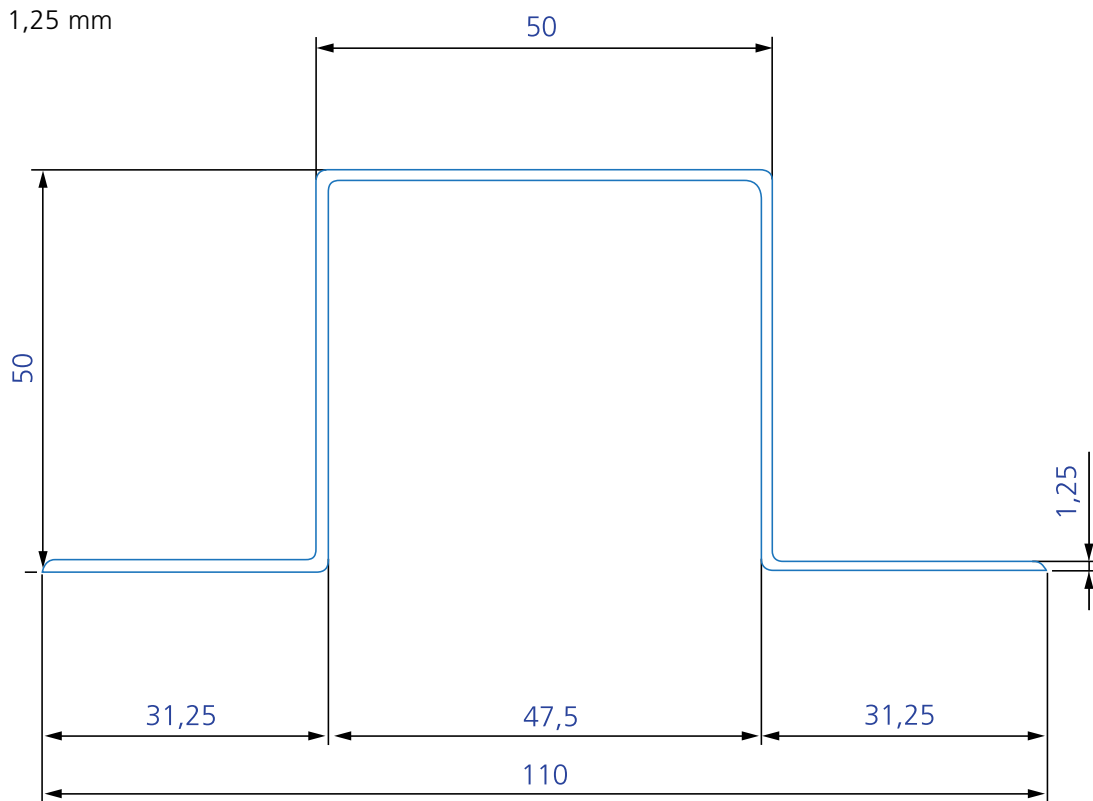

## L-PROFILE

MATERIAL: 1.4401 / 1.4404  
WEIGHT: 1,1 kg/lm  
LENGTH: 3000-6000 mm  
THICKNESS: 1,25 mm

